

AccuTouch Five-Wire Resistive Touchscreens

For Human-Machine Interface

AccuTouch touchscreens, the proven market leader in five-wire resistive technology, are the preferred solution for applications that demand reliability, input flexibility, and contamination resistance. AccuTouch resistive touchscreens, with proprietary Elo Touch Solutions technology, deliver a touch response that is drift-free and accurate in high-use applications. Compare the five-wire design of AccuTouch, where both X and Y measurements are made on a stable rear glass layer where other resistive touchscreen designs use a flexing plastic cover-sheet to measure only one axis. As a result, AccuTouch resistive touchscreens provide a longer product life backed by a five-year warranty—withstanding more than 35 million touches versus the one-year warranty typical with shorter life four and eight-wire touchscreens from other manufacturers. AccuTouch touchscreens can be sealed against contamination to support NEMA 4/4x/12 and IP65 standards. AccuTouch touchscreens are the ideal solution for point-of-sale (POS), voting machines, industrial automation, medical equipment, retail, office, and pharmacy automation.

AccuTouch touchscreens are available in four configurations: improved, enhanced, true-flat and Zero-bezel. With improved and enhanced AccuTouch touchscreens, a flat flexible cable is soldered to the glass. AccuTouch true-flat and Zero-bezel touchscreens use a flexible printed circuit cable that virtually elimi-

nates the cable attachment bump that is typical on most resistive touchscreens and enable a smooth, flat integration.

Benefits

- Stable, drift-free operation
- Broad input flexibility
- Contamination resistance
- Accuracy in high-use applications
- Can be sealed to support NEMA 4/4x/12 and IP65 standards upon integration
- Flat-cable attachment for seamless integration
- 3H, 4H pencil hardness resists scratching

Applications

- Point-of-sale (POS) terminals
- Voting machines
- Industrial automation
- Medical equipment
- Office automation
- Retail automation
- Pharmacy automation

AccuTouch Five-Wire Resistive Specifications

MECHANICAL

Input Method Finger, gloved hand, or stylus activation
Available Sizes 5.7" to 24.0"; visit www.elotouch.com for full specifications and other offerings

ELECTRICAL

Positional Accuracy Standard deviation error is less than 0.080 (2mm)
Resolution Touchpoint density is based on controller resolution of 4096 x 4096
Touch Activation Force Typically less than 4 ounces (113 grams)
Controller Board: Serial (RS232) and USB
Chip: Serial (RS232) and USB

OPTICAL


Light Transmission HL products: 80% ±5% at 550nm wavelength

ENVIRONMENTAL


Temperature/
Relative Humidity Operating: AccuTouch enhanced, AccuTouch true-flat, AccuTouch Zero-bezel—90% RH at 122°F (50°C) max
AccuTouch improved—90% RH at 140°F (60°C) max
Storage: AccuTouch enhanced, AccuTouch true-flat, AccuTouch Zero-bezel—90% RH at 122°F (50°C) max
for 240 hrs, non-condensing
AccuTouch improved—90% RH at 140°F (60°C) max for 240 hrs, non-condensing
Altitude Operating: 10,000 ft (3,048m)
Storage/transport: 50,000 ft (15,240m)
Chemical Resistance Industrial chemicals: acetone, methylene chloride, methyl ethyl ketone, isopropyl alcohol, hexane,
turpentine, mineral spirits, unleaded gasoline, diesel fuel, motor oil, transmission fluid, antifreeze.
Food-service chemicals: vinegar, coffee, tea, grease, cooking oil, salt, plus most commercial cleaners
including ammonia-based glass cleaner and laundry detergent.
Electrostatic Protection Per EN 61000-4-2, 1995: Withstands 20 discharges up to 15kV
Agency Approvals UL, cUL, TÜV, CE, FCC Class A
Sealability Can be sealed to meet NEMA 4 and 12 and IP 65 standards

DURABILITY


Surface Durability AccuTouch enhanced, AccuTouch improved: meets pencil hardness 3H per ASTM D3363
AccuTouch true-flat, AccuTouch Zero-bezel: meets pencil hardness 4H per ASTM D3363
Expected Life Operationally tested to 35 million touches in one location without failure
Warranty Touchscreen: 5-year limited warranty
Controller: 5-year limited warranty

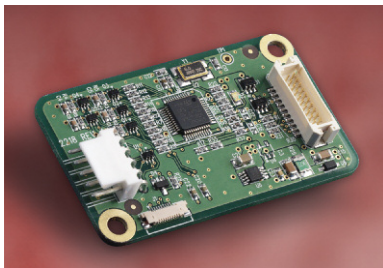

2218 combo controller board

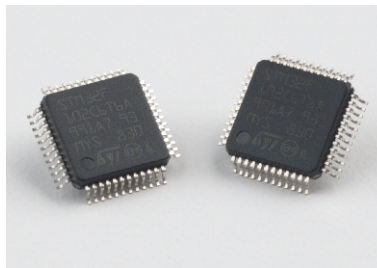

COACH V combo controller chip

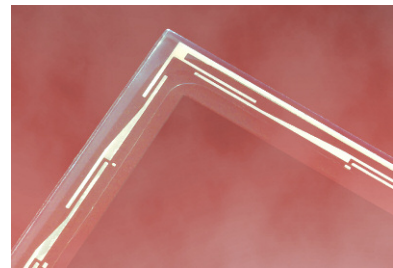

Z-border pattern for enhanced linearity

To find out more about our extensive range of Elo touch solutions, go to www.elotouch.com, or call the office nearest you.

North America

Elo Touch Solutions
301 Constitution Drive
Menlo Park, CA 94025-1110

800-ELO-TOUCH

Tel 1-650-361-4800

Fax 1-650-361-4722

customerservice@elotouch.com

Europe

Tel +32 (0)16 35 21 00

Fax +32 (0)16 35 21 01

elosales@elotouch.com

Asia-Pacific

Tel +81 (45) 478-2161

Fax +81 (45) 478-2180

www.tps.co.jp

Latin America

Tel 786-923-0251

Fax 305-931-0124

www.elotouch.com.ar

Elo Touch Solutions, Inc. reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. AccuTouch, Elo (logo), and Elo Touch Solutions are trademarks of Elo Touch Solutions, Inc.

Copyright 2012 Elo Touch Solutions, Inc. All rights reserved. 10/12