

Front



Rear



## Features


- VGA/HDMI/DP I/O support
- High transmittance
- High Contrast ideal for Outdoor Broadcasting (3000:1)
- Narrow Border Bezel (20 mm)
- Slim Design reduce to 61 mm

IP rating 65 (Front Panel)  
 Multi-fingers touch (30P)  
 Hover Touch: 2 points  
 (6mm glass & gloves)



I/O Interfaces

## Dimensions

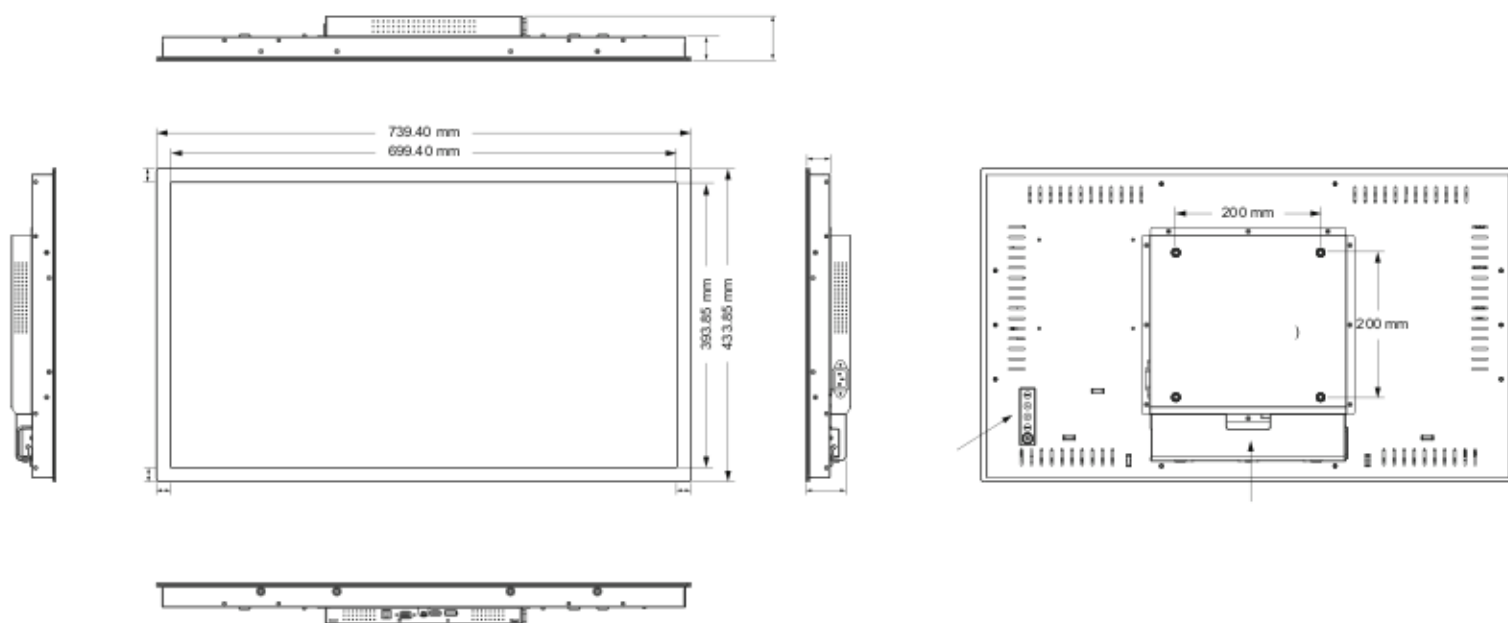

## Specifications

Model	LAM-32
Size	31.5" TFT LCD
Maximum Resolution	1,920 x 1,080
Contrast Ratio	3000:1
Brightness (Backlight Type)	500 nits (No Touch), 450 nits (P-CAP)
View Angle	H:178°, V:178°
<b>Touch LCD Display</b>	
Touch Screen	Projected Capacitive
Touch Points	30 points Touch (windows)
Hover Touch	2 points 6mm glass / gloves 5pts
Touch Screen Interface	USB-HID (Type B)
<b>IO ports</b>	
Serial Port	No
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x DP, 1 x HDMI 1.3 (up to 1920 x 1080 @ 60)
Audio Port	No
Power Input	1 x AC inlet
<b>Physical Properties</b>	
Power Supply	60W Internal Power Adaptor
Speaker	No
Housing Color	Black
Material	Glass, SECC Metal
Compliance	Front Panel IP65 Compliant
Dimensions (W x H x D) mm	744.4 x 438.85 x 61mm
Net Weight (kg)	10.35 kg
Gross Weight (kg)	13.5 kg
Carton (W x H x D) mm	95 x 28.5 x 64.5 cm
VESA	200 x 200 mm
<b>Safety</b>	
Certifications	CE, CB, FCC, UL, CCC
<b>Environment</b>	
Operating Temperature	0°C - 40°C
Operating Humidity	20% - 80% RH. Non-Condensing
Storage Temperature	-20°C - 60°C
Storage Humidity	10% - 90% RH. Non-Condensing

